AIRLINK 101™

SkyIPCam 250 Network Camera

Model # AIC250

Quick Installation Guide

Ver. 1B

Section 1

This Quick Installation Guide only provides the basic instructions. For more detailed information, please refer to the User's Manual in the supplied CD.

Getting Started

Note: *Before using the IP Camera, you'll need to perform the following tasks:*

1. Connect the IP Camera to your network.
2. Install the Setup Wizard.
3. Gather information about your local network address.
4. Configure the IP Camera using the Setup Wizard.

Please follow the steps in this Guide carefully to ensure proper setup of the IP Camera.

Caution: *The IP Camera is designed for indoor use only. Direct exposure to sunlight may cause permanent damage to the CMOS sensor. When operating in extremely bright environment, an iris lens or sun visor is recommended to protect the IP Camera.*

Step 1 Connect one end of a network cable to the IP Camera and connect the other end to one of the **LAN** ports of the router or switch *(See the diagram below)*.

Step 2 Power on the IP Camera by connecting one end of the supplied power adapter to the power jack of the Camera and connecting the other end to an electrical outlet.

Step 3 Verify that all the lights on the Camera are lit. If not, verify that all the connections are secure and try again.

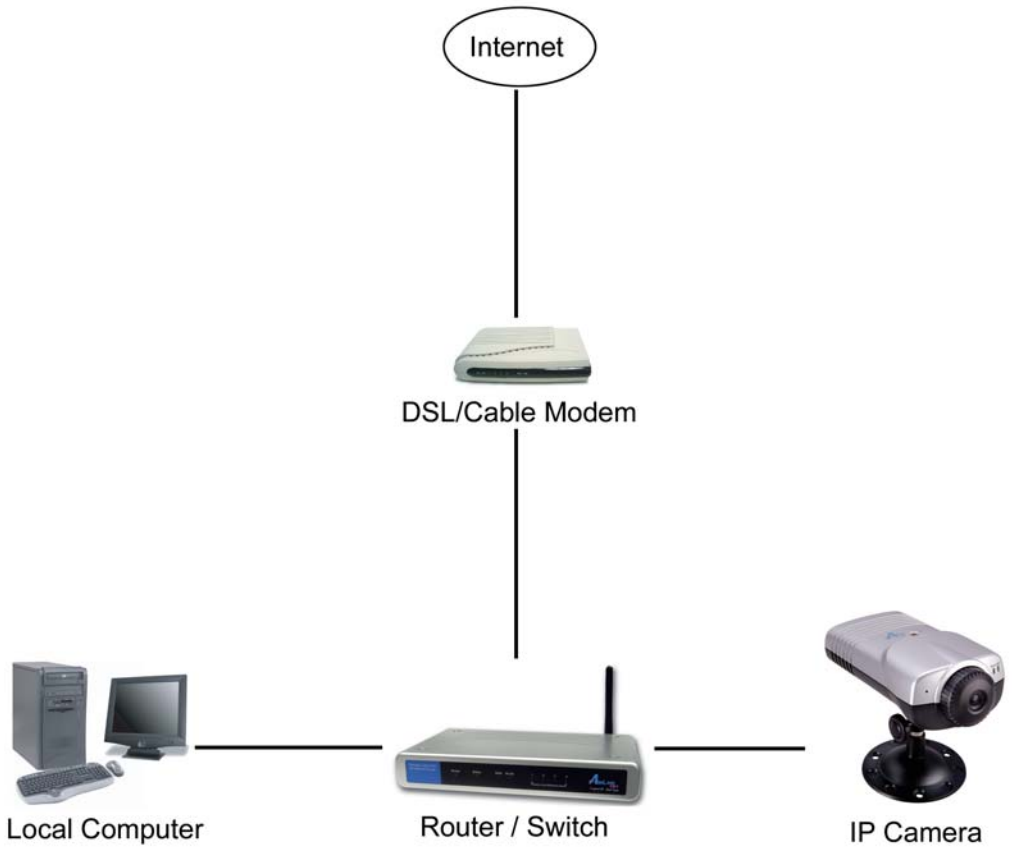

Section 2

Installing the Setup Wizard

Step 1 Insert the provided CD and wait for the autorun screen to appear.

Step 2 Click on **Install Wizard**.

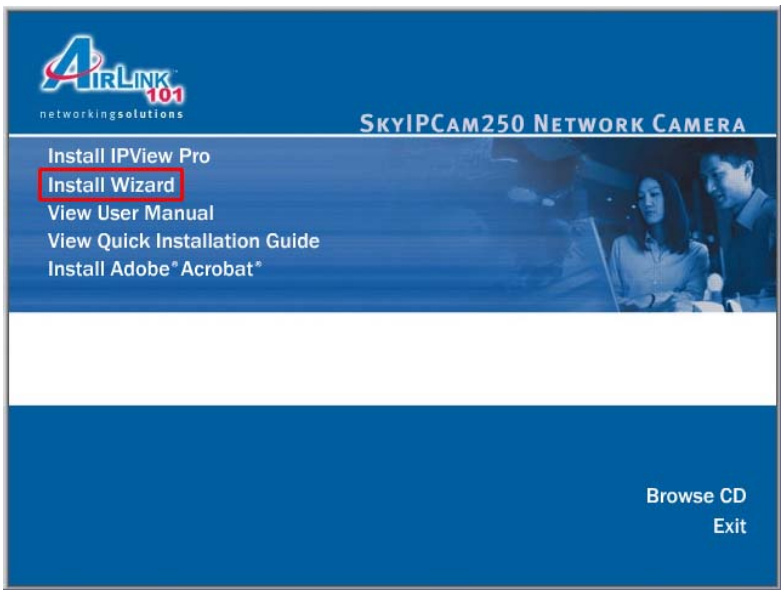

Note: *If the autorun screen does not appear automatically, go to* ***Start***, ***Run***, *type* ***D:\autorun.exe*** *(where* ***D*** *is the letter of your CD drive) and click* ***OK****.*

Step 3 Click **Next**.

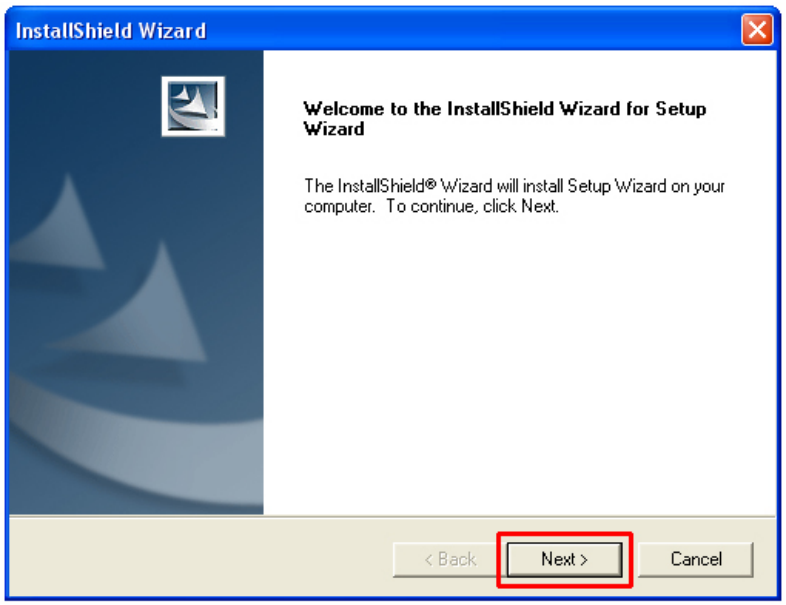
InstallShield Wizard
Welcome to the InstallShield Wizard for Setup Wizard
The InstallShield® Wizard will install Setup Wizard on your computer. To continue, click Next.
< Back
Next >
Cancel

Step 4 Click **Yes** to accept the License Agreement.

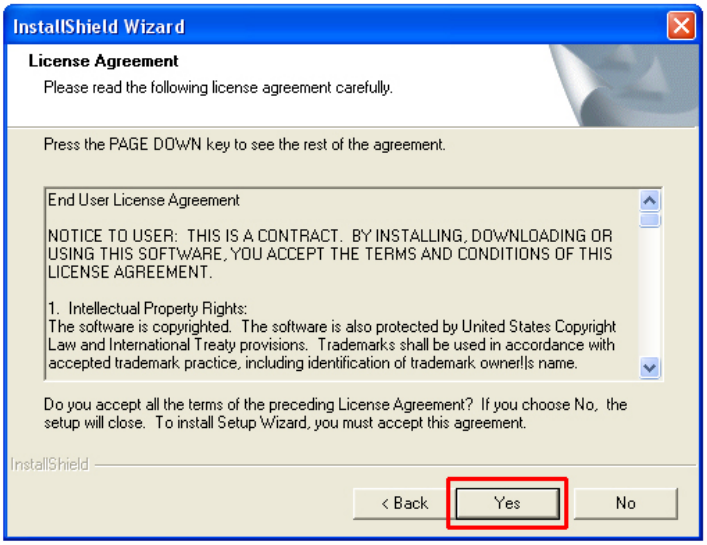
InstallShield Wizard
License Agreement
Please read the following license agreement carefully.
Press the PAGE DOWN key to see the rest of the agreement.
End User License Agreement
NOTICE TO USER: THIS IS A CONTRACT. BY INSTALLING, DOWNLOADING OR USING THIS SOFTWARE, YOU ACCEPT THE TERMS AND CONDITIONS OF THIS LICENSE AGREEMENT.
1. Intellectual Property Rights:
The software is copyrighted. The software is also protected by United States Copyright Law and International Treaty provisions. Trademarks shall be used in accordance with accepted trademark practice, including identification of trademark owner!Is name.
Do you accept all the terms of the preceding License Agreement? If you choose No, the setup will close. To install Setup Wizard, you must accept this agreement.
InstallShield
< Back
Yes
No

Step 5 Click **Next** to accept the default Destination Folder.

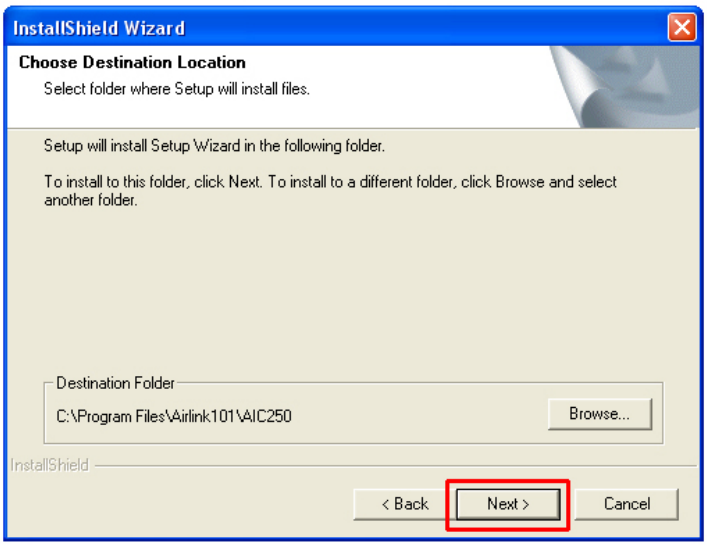
InstallShield Wizard
Choose Destination Location
Select folder where Setup will install files.
Setup will install Setup Wizard in the following folder.
To install to this folder, click Next. To install to a different folder, click Browse and select another folder.
Destination Folder
C:\Program Files\Airlink101\AIC250
Browse...
InstallShield
< Back
Next >
Cancel

Step 6 Click **Finish** to complete the installation.

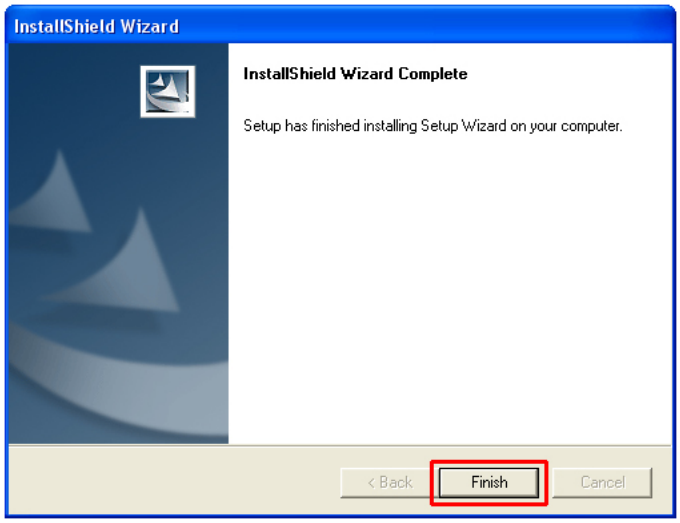

Section 3

Gathering Information

Note: *Before using the Setup Wizard, you'll need to take note of your local network address.*

Step 1 Click on **Start**, **Run**, and type **command** (for Windows 95/98/ME) or **cmd** (for Windows 2000/ XP) and click **OK**. The command prompt will appear.

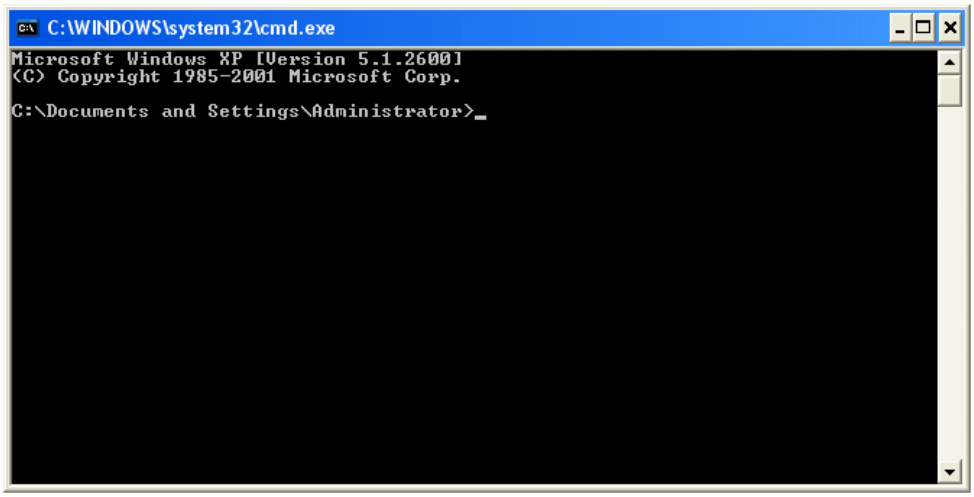

Step 2 At the command prompt, type **ipconfig** and press **Enter**.

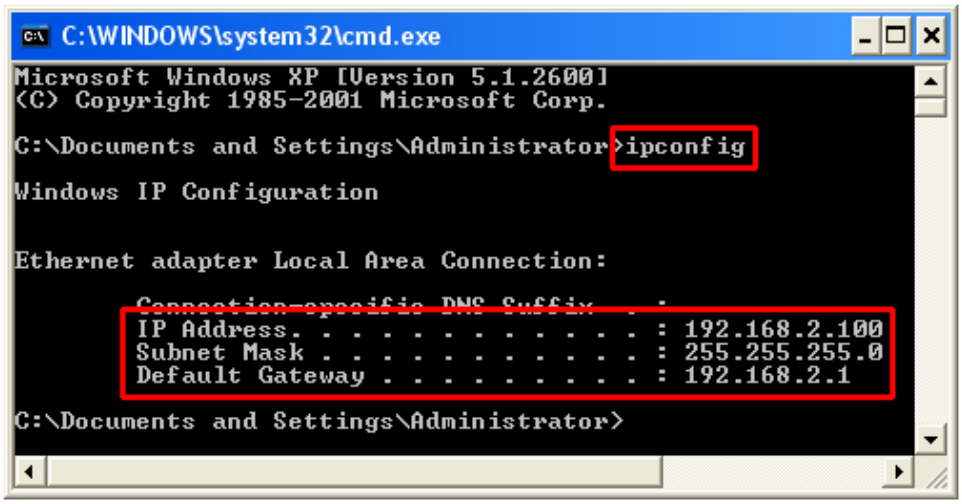
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\Administrator>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
IP Address. . . . . : 192.168.2.100
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.2.1
C:\Documents and Settings\Administrator>

Step 3 Write down the information for the **IP Address**, **Subnet Mask**, and **Default Gateway**. You will need these information later.

Section 4

Using the Setup Wizard

Step 1 Go to **Start > (All) Programs > AirLink101 IP Camera Setup Wizard**.

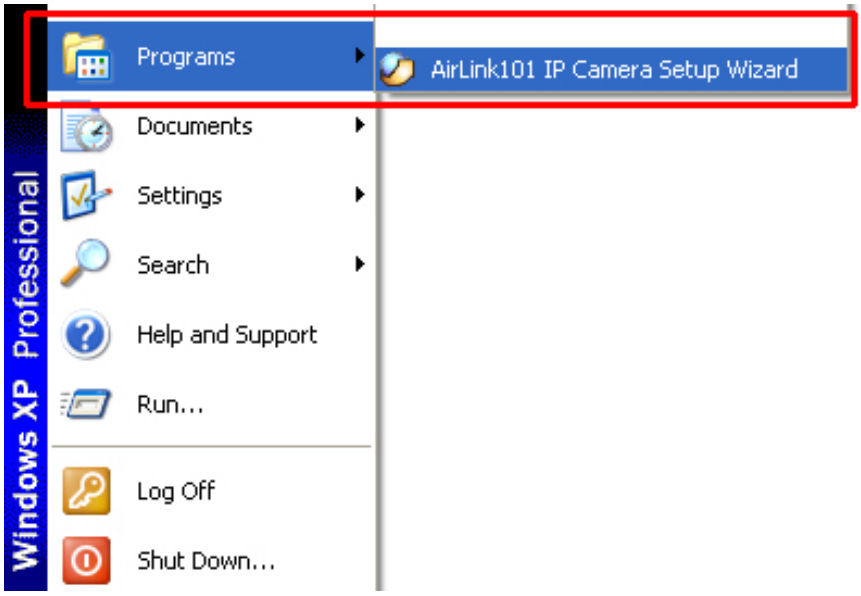

Step 2 Select the IP Camera you want to configure from the list and click on the **Wizard** button.

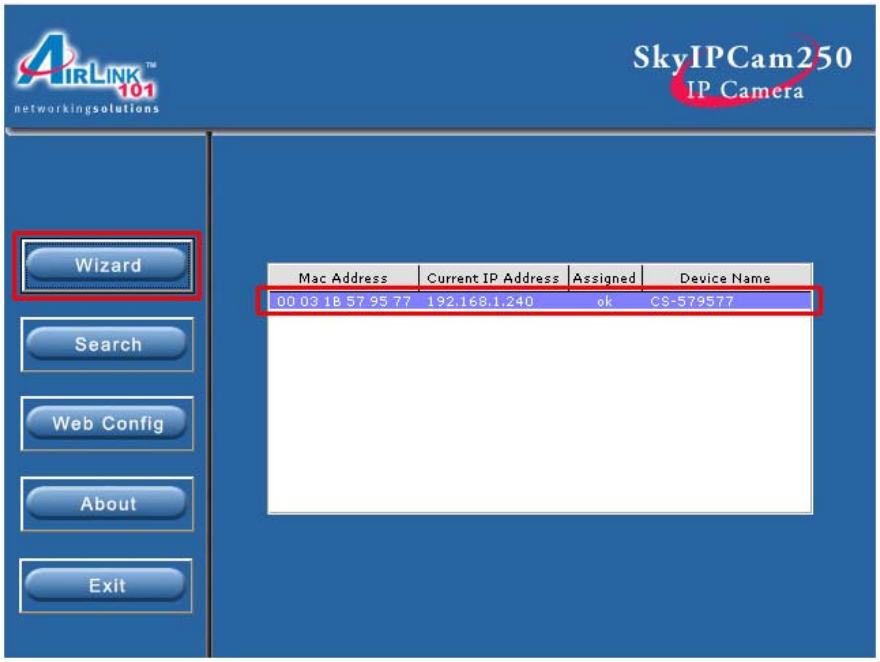

Step 3 If the Camera's default IP Address is on a different subnet, the following message will appear. Click **Yes** to continue.

Setup Wizard
Your camera's IP Address may be invalid. Please change your camera's IP Address to match your network settings, or you will be unable to connect to the camera.
Would you like to change the IP Address now?
Yes
No

Note: *If you do not receive this message, skip to* ***Step 9****.*

Step 4 Enter **admin** for both the Admin ID and Password and click **OK**.

Step 5 In the **IP Address** field, change the first three numbers to match your local network address.

For example: If your computer's **IP Address** is **192.168.2.100**, change the first three numbers to **192.168.2** as well but leave the last number **240** alone.

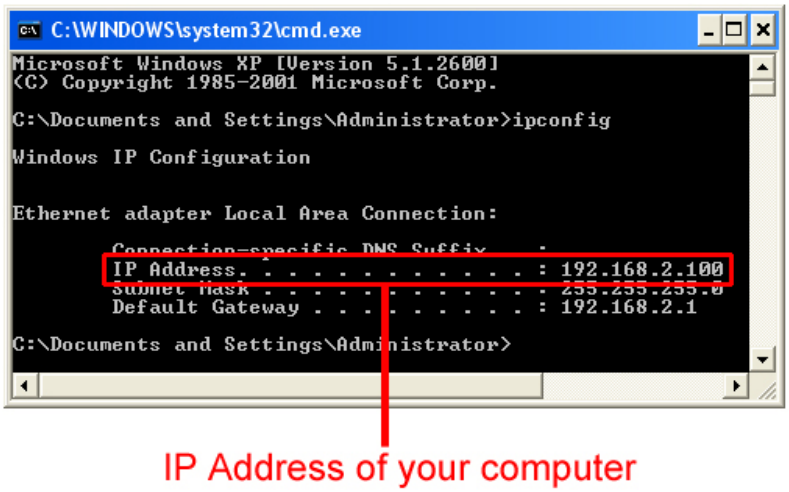
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\Administrator>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
IP Address. . . . . : 192.168.2.100
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.2.1
C:\Documents and Settings\Administrator>
IP Address of your computer

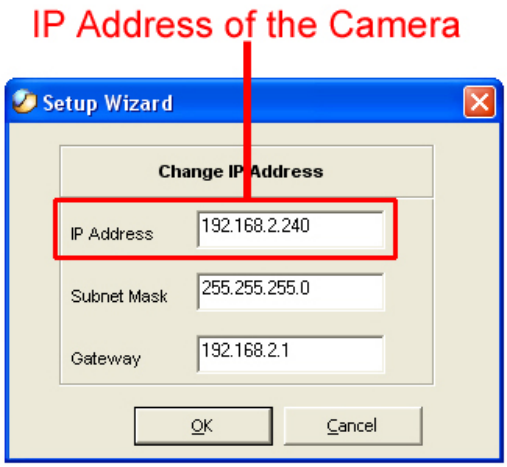

Step 6 Enter the **Subnet Mask** and **Gateway** fields with exactly the same values as you got from running **ipconfig**. Click **OK** to continue.

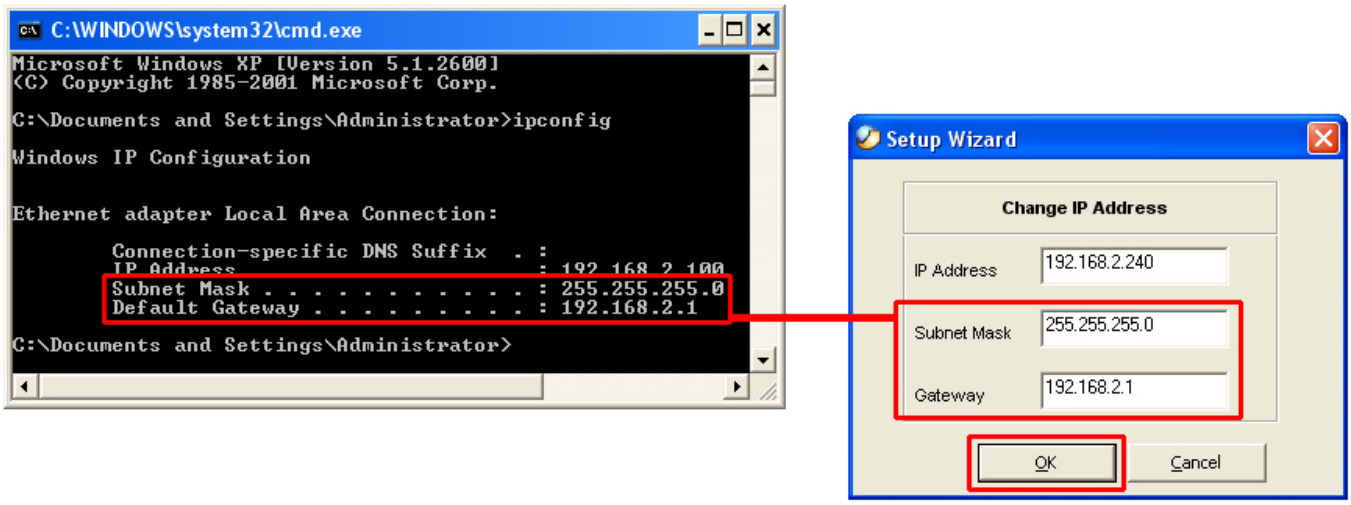

Step 7 After the Camera has restarted, click the **Exit** button to close the Setup Wizard.

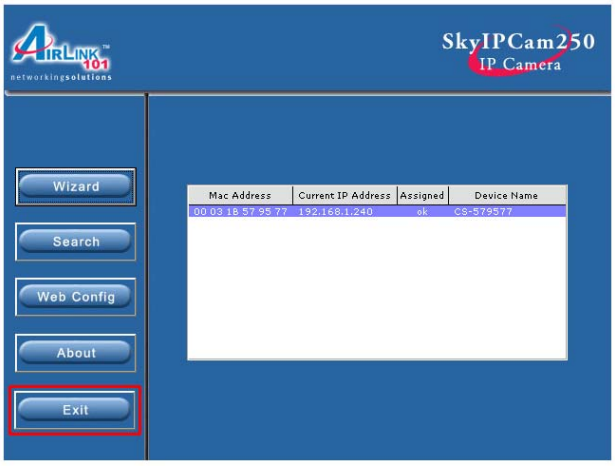

Step 8 Start the Setup Wizard again and make sure the **Current IP Address** field displays the new IP Address. Select the Camera and click on the **Wizard** button.

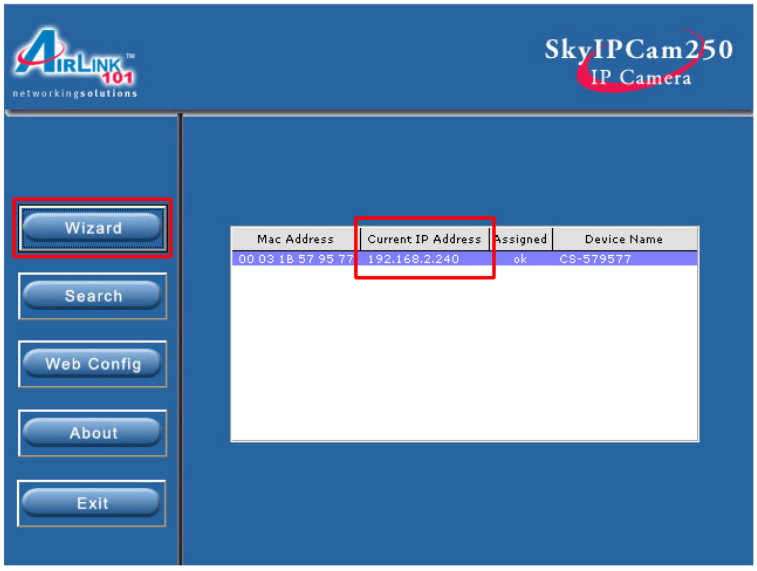

Step 9 The Setup Wizard appears asking you to change the Admin ID and Password. The default Admin ID and Password is **admin**.

Step 10 Enter **admin** for both the **Admin ID** and **Password** field, click on the **Change checkboxes** and enter the **New ID** and **New Password** and click **Next**.

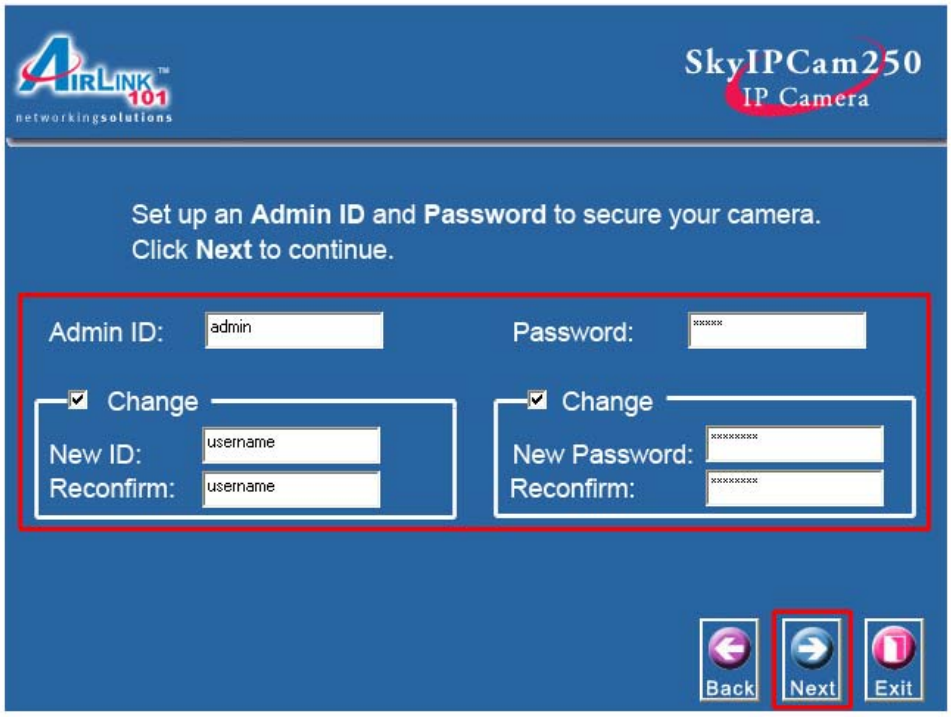

Step 11 If you need to change the Camera's IP Address because another network device is already using the same address, you can assign a new address here and click **Next**.

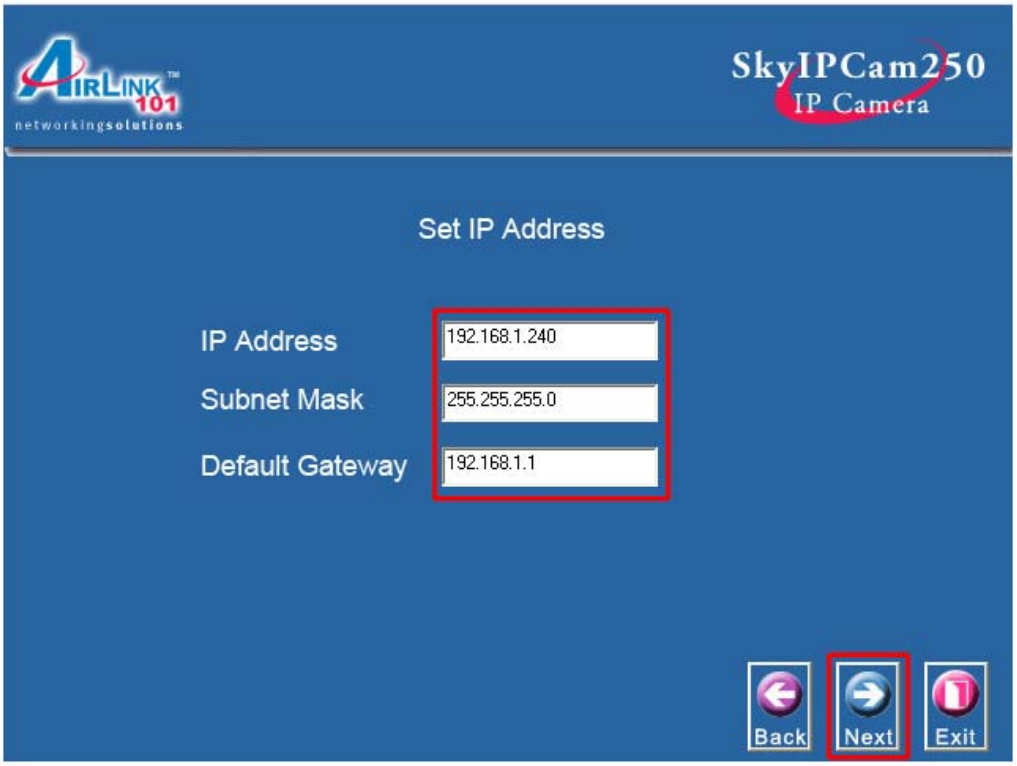

Step 12 Verify all the fields are correct and click **Restart** to save the settings and reboot the Camera.

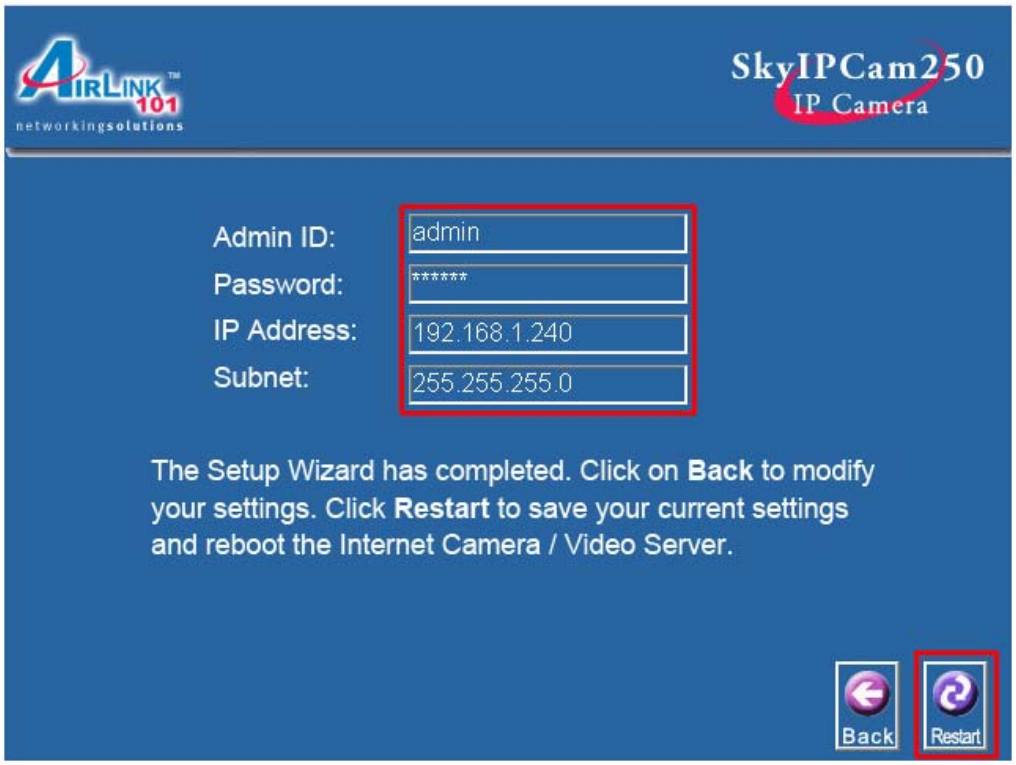

Section 5

Viewing Images

Note: *The following steps describe how to view images from within the same local area network as the IP Camera. To view images from an external network such as the Internet, please refer to the User's Manual on the provided CD for further instructions.*

Step 1 At the Setup Wizard, select the desired camera from the list and click on the **Web Config** button.

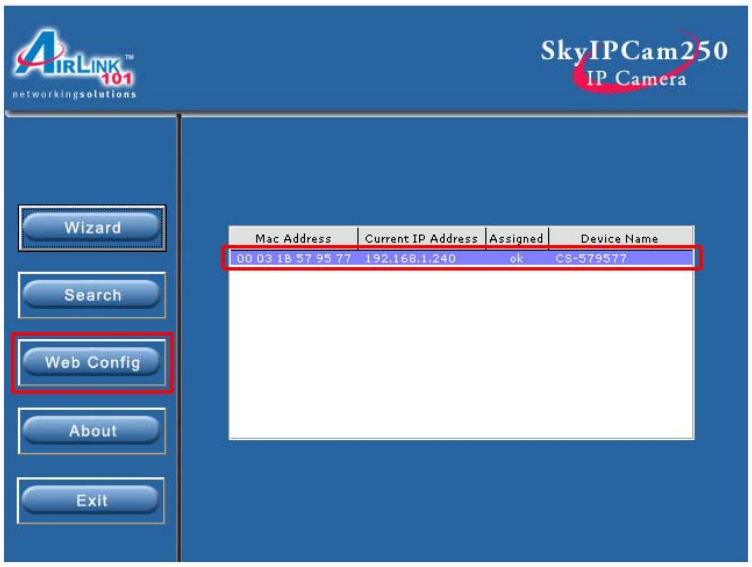

Step 2 The default page appears. You can view live video by selecting either the **ActiveX Mode** (Internet Explorer) or the **Java Mode** (Internet Explorer and Netscape).

Step 3 Turn the Camera's lens clockwise or counter-clockwise to focus.

Note: *ActiveX and/or Java Applet must be installed and enabled on your Web Browser (Internet Explorer or Netscape) before you can view the live videos. For more information, please refer to the User's Manual on the provided CD.*

Step 4 If you need to install Java Virtual Machine on your computer, do not follow the on-screen XP instructions. Rather, go to www.java.com/en/download/manual.jsp and follow the instructions on that web site to download and install the required Java software.

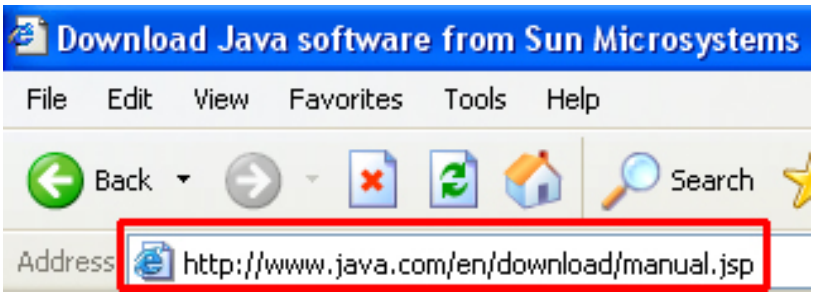

The IP Camera is ready for use now.

Section 6

Technical Support

E-mail: support@airlink101.com

Toll Free: 1-888-746-3238

Web Site: www.airlink101.com

Copyright © 2005 AirLink101. All rights reserved. AirLink101, the stylized AirLink101 logo, specific product designations, and all other words and logos that are identified as trademarks and/or service marks are, unless noted otherwise, the trademarks and service marks of AirLink101. All other product or service names are the property of their respective holders. AirLink101 products are protected under numerous U.S. and foreign patents and pending applications, mask work rights, and copyrights.